

# Smršťovací spojka-dutinka, různé průměry

Kód produktu: AM0551

EAN13: -

HS kód: 85369010

## Varianty produktu:

Průřez vodiče: 0.25-0.34mm<sup>2</sup>, 0.50-1.00mm<sup>2</sup>, 0.75-1.50mm<sup>2</sup>,  
2.50-4.00mm<sup>2</sup>, 1.50-2.50mm<sup>2</sup>, 6.00-10.00mm<sup>2</sup>, 4.00-6.00mm<sup>2</sup>

## Parametry produktu:

Krytí: IP67

Průrazné napětí: 1000V



## Popis výrobku:

Smršťovací poměr: 2:1

Materiál: Nylon


Pájka: bezolovnatý cín

Barva	Modelové označení	Průřez vodiče	A (min.)	L (min.)	B (min.)	B + C (max.)	C (min.)
Bílá	SST-11	0.25-0.35mm <sup>2</sup>	1.7mm	26mm	1.0mm	1.7mm	0.76mm
Červená	SST-21	0.50-1.00mm <sup>2</sup>	2.7mm	40mm	1.4mm	2.7mm	1.2mm
Zelená	SST-51	0.75-1.50mm <sup>2</sup>	3.5mm	40mm	1.5mm	3.5mm	1.3mm
Modrá	SST-31	1.50-2.50mm <sup>2</sup>	4.5mm	40mm	2.3mm	4.5mm	2.0mm
Fialová	SST-61	2.50-4.00mm <sup>2</sup>	5.5mm	40mm	2.5mm	5.5mm	2.2mm
Žlutá	SST-41	4.00-6.00mm <sup>2</sup>	6.0mm	40mm	3.7mm	6.0mm	3.4mm
Oranžová	SST-71	6.00-10.00mm <sup>2</sup>	7.3mm	30mm	3.8mm	7.3mm	3.4mm





Low Temperature Solder Sleeve:  
Minimum Shrink Temperature: 80°C  
Minimum Temperature for Solder to Melt: 138°C

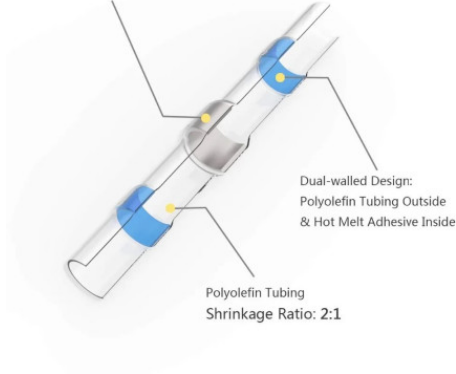

① Strip wire insulation 1/3 inch on both wire ends. Twist the strands together.

② Apply heat while continuously rotating the wire to make the terminal evenly heated.

③ The tubing will shrink down. Solder will melt and flow through the stripped wires.

**NOTE: NO Crimping Needed!**