

# Krympemuffe, forskellige diametre

Produktkode: AM0551

EAN13: -

HS-kode: 85369010



## Produktvarianter:

Ledertværsnit: 0,25-0,34 mm<sup>2</sup>, 0,50-1,00 mm<sup>2</sup>, 0,75-1,50 mm<sup>2</sup>,  
1,50-2,50 mm<sup>2</sup>, 2,50-4,00 mm<sup>2</sup>, 4,00-6,00 mm<sup>2</sup>, 6,00-10,00 mm<sup>2</sup>

## Produktparametre:

Dækning: IP67


Gennembrudsspænding: 1000 V

## Produktbeskrivelse:

Krympeforhold: 2:1

Materiale: Nylon


Lodde: blyfri tin

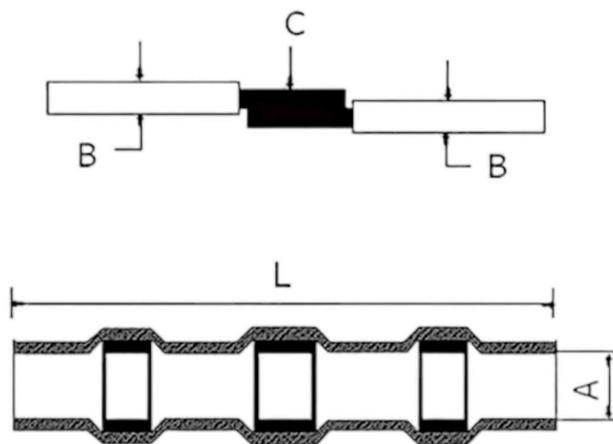

Farve	Modelbetegnelse	Ledertværsnit	A (min.)	L (min.)	B (min.)	B + C (maks.)	C (min.)
hvid	SST-11	0,25-0,35 mm <sup>2</sup>	1,7 mm	26 mm	1,0 mm	1,7 mm	0,76 mm
Rød	SST-21	0,50-1,00 mm <sup>2</sup>	2,7 mm	40 mm	1,4 mm	2,7 mm	1,2 mm
Grøn	SST-51	0,75-1,50 mm <sup>2</sup>	3,5 mm	40 mm	1,5 mm	3,5 mm	1,3 mm
Blå	SST-31	1,50-2,50 mm <sup>2</sup>	4,5 mm	40 mm	2,3 mm	4,5 mm	2,0 mm
lilla	SST-61	2,50-4,00 mm <sup>2</sup>	5,5 mm	40 mm	2,5 mm	5,5 mm	2,2 mm
Gul	SST-41	4,00-6,00 mm <sup>2</sup>	6,0 mm	40 mm	3,7 mm	6,0 mm	3,4 mm
orange	SST-71	6,00-10,00 mm <sup>2</sup>	7,3 mm	30 mm	3,8 mm	7,3 mm	3,4 mm



Low Temperature Solder Sleeve:  
 Minimum Shrink Temperature: 80°C  
 Minimum Temperature for Solder to Melt: 138°C

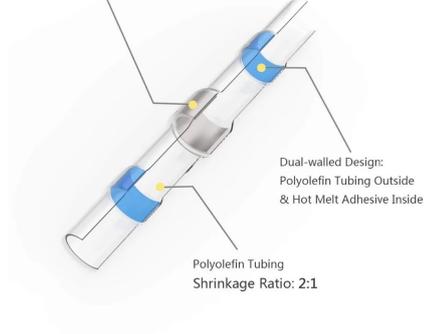

- ① Strip wire insulation 1/3 inch on both wire ends. Twist the strands together.
- ② Apply heat while continuously rotating the wire to make the terminal evenly heated.



- ③ The tubing will shrink down. Solder will melt and flow through the stripped wires.
- NOTE: NO Crimping Needed!**