


ledert
værsni
t

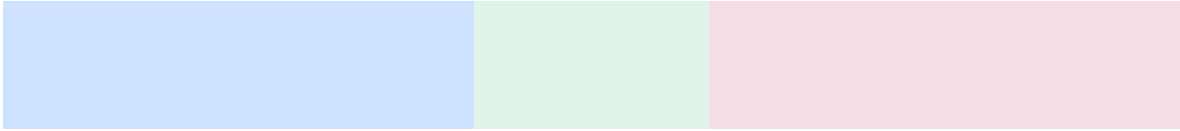

Maksimal strøm: 25A

Maksimal spænding: 250V AC

Beskyttelse: IP68



Arbejdstemperatur: -20 - 110°C

Relativ luftfugtighed: 90% - 95%

Materiale: Polyamid

Pakkens indhold: han + hun SP20

Galleri:



PG13.5	
Max. strøm	10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100
Max. spænding	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. temperatur	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. fugtighed	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. tryk	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. vibration	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chok	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chokspænding	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chokstrøm	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. choktid	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chokfrekvens	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chokenergi	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chokimpedans	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chokvinkel	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chokafstand	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chokradius	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chokhastighed	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chokretning	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. choktype	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chokmateriale	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chokfarve	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chokmærke	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chokproducent	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chokmodel	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. chokserie	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. choktypekode	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. choktypebetegnelse	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. choktypebeskrivelse	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. choktypeurl	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. choktypekontakt	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. choktypekontaktbetegnelse	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. choktypekontakturl	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. choktypekontaktbetegnelse	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000
Max. choktypekontakturl	100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000