




ledert  
værsni  
t

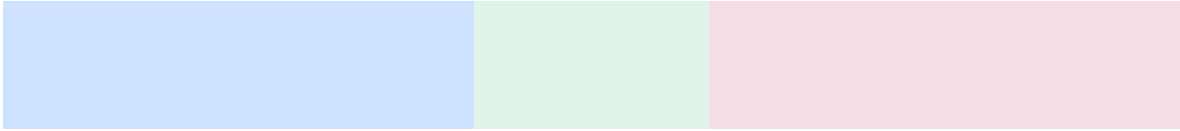

Maksimal strøm: 25A

Maksimal spænding: 250V AC

Beskyttelse: IP68



Arbejdstemperatur: -20 - 110°C

Relativ luftfugtighed: 90% - 95%

Materiale: Polyamid

Pakkens indhold: han + hun SP20

## Galleri:



Model	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Material	PA66	PA66	PA66	PA66	PA66	PA66	PA66	PA66	PA66	PA66	PA66	PA66	PA66	PA66	PA66	PA66	PA66	PA66	PA66	PA66
Rated voltage	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100
Rated current (AC)	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
Rated current (DC)	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
Contact resistance (mΩ)	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
Insulation resistance (MΩ)	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100
Temperature range (°C)	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20
Storage temperature (°C)	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20	-20