

# Schrumpfschlauch, verschiedene Durchmesser

Artikel-Nr.: AM0551  
 EAN13: -  
 HS kód: 85369010



## Produktvarianten:

Leiterquerschnitt: 0,25-0,34 mm<sup>2</sup>, 0,50-1,00 mm<sup>2</sup>, 0,75-1,50 mm<sup>2</sup>,  
 1,50-2,50 mm<sup>2</sup>, 2,50-4,00 mm<sup>2</sup>, 4,00-6,00 mm<sup>2</sup>, 6,00-10,00 mm<sup>2</sup>

## Produktparameter:


Abdeckung: IP67  
 Durchbruchspannung: 1000 V

## Beschreibung des Produkts:

Schrumpfverhältnis: 2:1

Material: Nylon


Lot: bleifreies Zinn

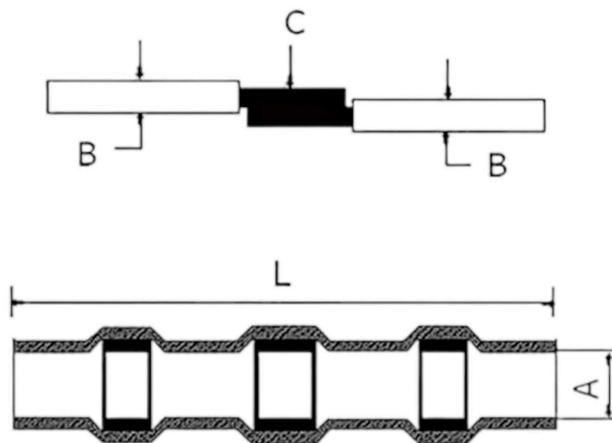

| Farbe  | Modellbezeichnung | Leiterquerschnitt          | A (min.) | L (min.) | B (mind.) | B + C (max.) | C (min.) |
|--------|-------------------|----------------------------|----------|----------|-----------|--------------|----------|
| Weiß   | SST-11            | 0,25-0,35 mm <sub>2</sub>  | 1,7 mm   | 26 mm    | 1,0 mm    | 1,7 mm       | 0,76 mm  |
| Rot    | SST-21            | 0,50-1,00 mm <sub>2</sub>  | 2,7 mm   | 40mm     | 1,4 mm    | 2,7 mm       | 1,2 mm   |
| Grün   | SST-51            | 0,75-1,50 mm <sub>2</sub>  | 3,5 mm   | 40mm     | 1,5 mm    | 3,5 mm       | 1,3 mm   |
| Blau   | SST-31            | 1,50-2,50 mm <sub>2</sub>  | 4,5 mm   | 40mm     | 2,3 mm    | 4,5 mm       | 2,0 mm   |
| lila   | SST-61            | 2,50-4,00 mm <sub>2</sub>  | 5,5 mm   | 40mm     | 2,5 mm    | 5,5 mm       | 2,2 mm   |
| Gelb   | SST-41            | 4,00-6,00 mm <sub>2</sub>  | 6,0 mm   | 40mm     | 3,7 mm    | 6,0 mm       | 3,4 mm   |
| Orange | SST-71            | 6,00-10,00 mm <sup>2</sup> | 7,3 mm   | 30mm     | 3,8 mm    | 7,3 mm       | 3,4 mm   |



Low Temperature Solder Sleeve:  
 Minimum Shrink Temperature: 80°C  
 Minimum Temperature for Solder to Melt: 138°C

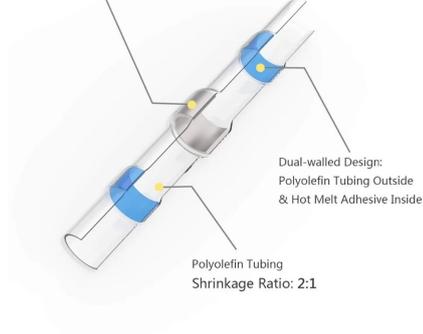

- ① Strip wire insulation 1/3 inch on both wire ends. Twist the strands together.
- ② Apply heat while continuously rotating the wire to make the terminal evenly heated.



- ③ The tubing will shrink down. Solder will melt and flow through the stripped wires.
- NOTE: NO Crimping Needed!**