

Multi-turn potentiometer 3590S-2, 2W

Product codes:

Reference: AM1506

EAN13: -

UPC: 85334090

Product features:


Temperature coefficient: ± 50 ppm/ $^{\circ}\text{C}$

Tolerance: 5%

Performance: 2 W

Waterproof grade: IP40

Number of pins: 3-pin

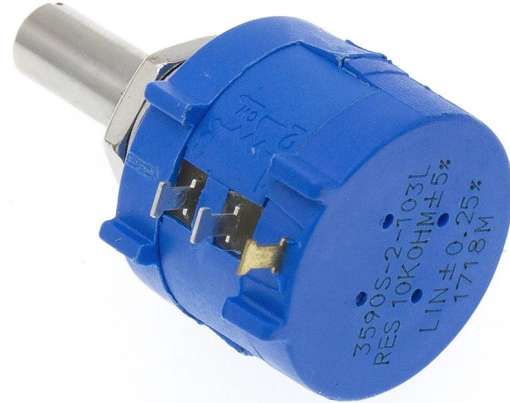

Product attributes:

Resistance: 101, 100 Ohm, 100R, 201, 200 Ohm, 200R, 501, 500 Ohm, 500R, 102, 1 kOhm, 1K, 202, 2 kOhm, 2K, 502, 5 kOhm, 5K, 103, 10 kOhm, 10K, 203, 20 kOhm, 20K, 503, 50 kOhm, 50K, 104, 100 kOhm, 100K

Product description:

Linear potentiometer, multi-turn with $\pm 5\%$ tolerance .

Pd - Power dissipation: 2 W

Number of turns: 10 (3600°)

Type of potentiometer: axial

Track type: wire

Potentiometer features: precision

Linearity Tolerance: $\pm 0.25\%$

Min. insulation resistance: 1000mOhm

Dimensions: 39.3 x 18.6mm

Shaft length: 12.6mm, shaft diameter: 6.35mm

Mounting hole diameter: 9.5mm (nut attachment)

Type designation:

3590S-2-101L (100 Ohm)

3590S-2-201L (200 Ohm)

3590S-2-501L (500 Ohm)

3590S-2-102L (1 kOhm)

3590S-2-202L (2 kOhm)

3590S-2-502L (5 kOhm)

3590S-2-103L (10 kOhm)

3590S-2-203L (20 kOhm)

3590S-2-503L (50 kOhm)

3590S-2-104L (100 kOhm)

Product gallery:

