

SP16 panel mount, IP68 waterproof cable connector, 9-pin

Reference: AM2465
EAN13: -
UPC: 85369010

Product attributes:

Product features:


Current: 5 A
Voltage: 250 V AC
Number of pins: 9-pin



Product description:

Waterproof panel connector for 5.5 - 8mm diameter wires. Gold plated contacts.

Maximum current: 5A
Maximum voltage: 250V AC
Protection: IP68
Operating temperature: -20 - 110°C (-4 - 110°F)
Relative humidity: 90% - 95%
Material: Polyamide

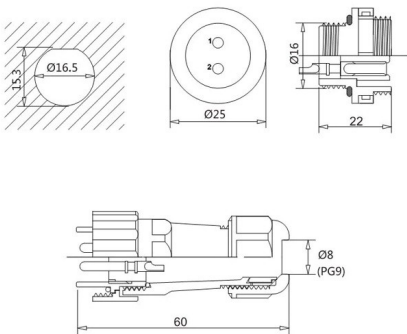

SP16	02	03	04	05	07	09
M1ae contact face view						
Contact diameter	Ø1.8×2	Ø1.8×3	Ø1×4	Ø1×5	Ø1×7	Ø1×9
Rated current (A)	10A	5A	5A	5A	5A	5A
Rated voltage (AC V)	250V	250V	250V	250V	250V	250V
Test voltage (AC V)	1500V	1500V	1500V	1500V	1500V	1500V
Contact resistance (mΩ)	2	2	5	5	5	5
Insulation resistance (MΩ)	2000	2000	2000	2000	2000	2000