


# sBoard II control unit, for P2P access, WG-26-37

Reference: AM6804  
EAN13: -  
HS code: 85412900

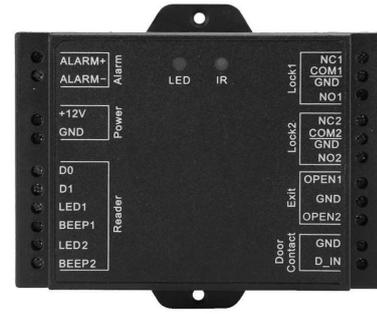

## Product attributes:

## Product features:

Voltage: 12 V DC  
Waterproof grade: IP65

## Product description:

**Controller for 1 to 2 doors. The main advantage of using this unit is that it ensures increased security of user access control, since the control unit is connected to the reader or keyboard via the WG - Wiegand interface, and there is no risk of opening the locks/doors when disassembling the outdoor device itself and making electrical manual connections inside the keyboard or reader. This externally accessible device then sends a signal in Wiegand format to the sBoard II via Wiegand, which then opens any lock.**

### Features:

- Compact, space-saving and practical control unit. Reliable and suitable for mounting in a type 86 box for installation inside rooms
- All settings of the sBoard II are very simple using the included IR remote control.
- The memory capacity is 2100 users, suitable for offices, villas, home use, etc.
- Doors with electric locks cannot be opened without authorization, even by disassembling the reader connected to the sBoard II.
- Each user's information can be easily copied between each reader/sboard II
- Each user can change their password without administrator confirmation if only one reader is connected
- It is possible to connect with various electric locks of both NO and NC type
- user data can be copied between units
- access can be shared with other users via QR code or by MASTER user cancellation

output format: Wiegand 26-37

maximum number of users: 2100

working voltage: 12, 24V DC (9-24V DC)

working current: max. 30mA

relay switching setting: 1-99 seconds (factory setting 5 seconds)

maximum lock load: 5A

output relay: 2x

working environment: -40 - +60°C, max. 90% humidity

size: 100x86x26mm

Unit weight: 110g

case material: plastic

