

Relay SMI-24VDC-SL-2C, 24V DC/250V AC 5A

Reference: AM0397

EAN13: -

HS code: 85364190

Product attributes:

Product features:

Voltage: 24 V DC

Waterproof grade: IP65

Number of pins: 8-pin

Max. switching current: 5 A

Max. switching voltage: 250V AC /30 V DC

Product description:

Fully encapsulated relay with heavy current changeover contact in industrial quality.

Contact type: changeover

Maximum contact current: 5A

Maximum contact voltage: 250V AC / 30V DC

Consumption: 0.54W


Coil resistance: 800Ω

Coil voltage: 24V

Dimensions: 29.0 x 20.6 x 12.6mm




Physical installation diagram

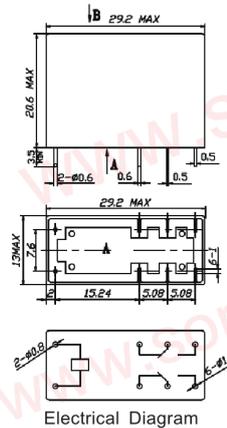


Electrical Diagram

Tolerance: ± 0.1 mm


PCB board diagram
(bottom view diagram)



Conversion 2C type



Normally open 2A type



Normally closed 2B type