

Thermally conductive adhesive tape

Reference: AM0480

EAN13: -

UPC: 38249996

Product attributes:

Width: 10 mm, 20 mm, 30 mm, 40 mm, 50 mm, 80 mm

Length: 5 m, 25 m

Product features:

Color: White

Max. operating temperature: 120 °C

Thermal conductivity: 1.2 W/mK

Thickness: 0.2 mm



Product description:

Thermally conductive adhesive tape for radiators with thermal conductivity up to 1.2W/mK. Thermal conductive tape is designed to ensure better heat transfer between the heat source - electronic component and its heat sink. It fills small irregularities between the surface of the heat sink and the surface of the cooled component and thus increases the heat transfer to the heat sink, which then has a greater cooling efficiency. By using heat transfer tape, you will improve the overall cooling efficiency and extend the life of the cooled components. Suitable for all semiconductors (LEDs), processors, graphics cards, memory modules and more. The tape is not electrically conductive.

Thermal conductivity: 1.2W/mKMinimum


operating temperature: -20°CMaximum

operating temperature: 120°CCohesive

strength: 0.2 kg/cm2



Thermal Conductive Adhesive Tape Use For Electronic Chips

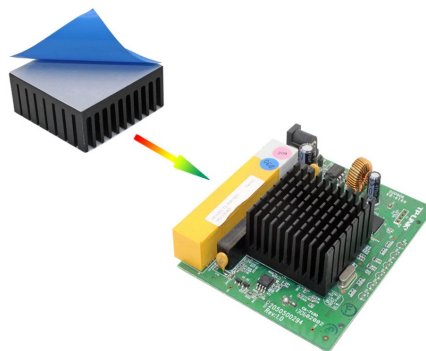

Thermal Conductive Adhesive Tape Use For LED

