

# Potentiometer BC1-50W

Reference: AM1946

EAN13: -

HS code: 85334090

## Product attributes:

Resistance: 2 Ohm, 2R0, 5 Ohm, 5R, 10 Ohm, 10R, 20 Ohm, 20R, 30 Ohm, 30R, 50 Ohm, 50R, 100 Ohm, 100R, 150 Ohm, 150R, 200 Ohm, 200R, 300 Ohm, 300R, 500 Ohm, 500R, 1 kOhm, 1K0, 2 kOhm, 2K0, 5 kOhm, 5K0



## Product features:

Tolerance: 10%

Performance: 50 W

Number of pins: 3-pin

## Product description:


Potentiometer with  $\pm 10\%$  tolerance.

Maximum voltage: 315 V AC, 220 V DC

Pd - Power loss: 50W

Number of turns: 1 (280°)  $\pm 10^\circ$

Operating temperature: -55° - 315°C

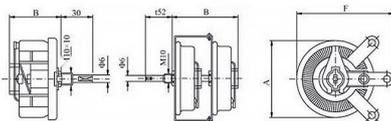

Model	Power (W)	Resistance Range (R)	Dimensions							Precision (%)	Temperature coeff.
			A	B	D	E	F	G			
BC1	25W	1Ω-1K	44	40	6		50	25	10%	±250ppm	
	50W	1Ω-2K	66	42	6		75	25			
	100W	1Ω-3K	84	44	6		102	25			
	150W	1Ω-3K	106	54	6		120	25			
	200W	1Ω-3K	106	54	6		120	25			
	300W	1Ω-3K	158	90	10	145	170	45			
	500W	1Ω-3K	206	90	10	192	215	60			
	50W*2	1Ω-4K	85	110	6		75	52			
	100W*2	1Ω-6K	115	145	6		102	52			
	150W*2	1Ω-6K	135	155	6		120	52			
	300W*2	1Ω-6K	180	165	10	145	170	38			
	500W*2	1Ω-6K	220	165	10	192	215	38			
	150W*3	1Ω-9K	135	220	6	100	120	25			
	300W*3	1Ω-9K	180	275	10	145	170	38			
	500W*3	1Ω-9K	220	295	10	192	215	38			
	500W*4	1Ω-12K	220	370	10	192	215	38			

