

GX20, cable connection connector, metal

Reference: AM4355

EAN13: -

HS code: 85369010

Product attributes:

Number of pins: 2-pin, 3-pin, 4-pin, 5-pin, 6-pin, 7-pin, 8-pin, 9-pin, 10-pin, 12-pin, 14-pin, 15-pin

Product features:

Voltage: 125 V AC

Waterproof grade: IP22

Transition resistance: 0.5 mOhm

Product description:

Waterproof docking connector for wires with a diameter of 8.0 - 9.0 mm.

Maximum voltage: 125V AC

Protection: IP22


Working temperature: -50 - 70°C

Relative humidity: 90% - 95%

Material: Metal

Package contents: male + female



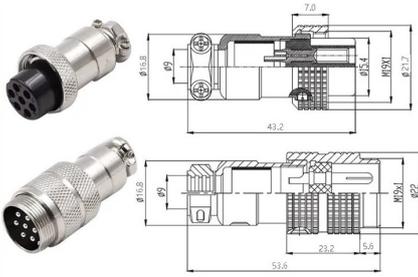

GX20	2	3	4	5	6	7	8	9	10	12	14	15
Contact number (cores)												
Contact dia	ø2×3.0	ø3×3.0	ø4×3.0	ø5×3.0	ø6×2.0	ø7×2.0	ø8×1.5	ø9×1.5	ø10×1.5	ø12×1.5	ø14×1.5	ø15×1.5
Rated current A	10A	7A	7A	7A	5A							
Rated/Pulse voltage (AC/V)	250V	250V	250V	150V								
Insulation/Contact Resistance MΩ	3.0/1500	3.0/1500	3.0/1500	3.0/1500	3.0/1500	3.0/1500	3.0/1500	3.0/1500	3.0/1500	3.0/1500	3.0/1500	3.0/1500