

GX12, panel connection connector, metal

Reference: AM5809

EAN13: -

HS code: 85369010



Product attributes:

Number of pins: 2-pin, 3-pin, 4-pin, 5-pin, 6-pin, 7-pin

Product features:

Voltage: 125 V AC

Waterproof grade: IP22

Transition resistance: 0.5 mOhm

Product description:

Waterproof docking connector for wires with a diameter of 4.0 - 5.0mm.

Maximum voltage: 125V AC

Protection: IP22


Working temperature: -50 - 70°C

Relative humidity: 90% - 95%

Material: Metal

Package contents: male + female



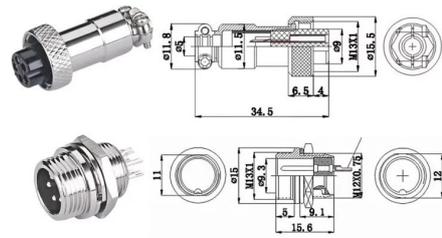

GX12	2	3	4	5	6	7
Contact number (cores)						
Contact dia	φ2×1.2	φ3×1.2	φ4×1.2	φ5×1.2	φ6×1.2	φ7×1.2
Rated current A	5A	5A	5A	3A	3A	3A
Rated/Pulse voltage(AC.V)	125V	125V	125V	125V	125V	125V
Insulation/Contact Resistance-MΩ	5.0/1500	5.0/1500	5.0/1500	5.0/1500	5.0/1500	5.0/1500