

GX16, panel connection connector, metal

Reference: AM8883

EAN13: -

HS code: 85369010

Product attributes:

Number of pins: 2-pin, 3-pin, 4-pin, 5-pin, 6-pin, 7-pin, 8-pin, 9-pin, 10-pin



Product features:

Voltage: 125 V AC

Waterproof grade: IP22

Transition resistance: 0.5 mOhm

Product description:

Waterproof docking connector for wires with a diameter of 5.0 - 6.5 mm.

Maximum voltage: 125V AC

Protection: IP22


Working temperature: -50 - 70°C

Relative humidity: 90% - 95%

Material: Metal

Package contents: male + female



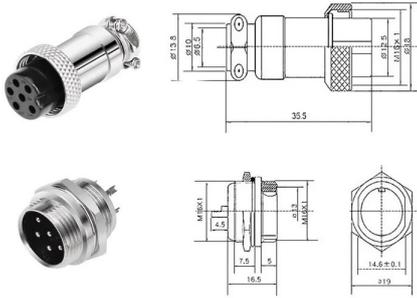

GX16	2	3	4	5	6	7	8	9	10
Contact number (cores)									
Contact dia	φ2×2.5	φ3×2.5	φ4×2.5	φ5×2.0	φ6×1.2	φ7×1.2	φ8×1.2	φ9×1.2	φ10×1.2
Rated current A	7A	7A	5A	5A	4A	4A	4A	4A	4A
Rated Pulse voltage (A.C.V)	125V								
Insulation/Contact Resistance (MΩ)	1.5/1500	1.5/1500	1.5/1500	2.0/1500	5.0/1500	5.0/1500	5.0/1500	5.0/1500	5.0/1500