

Heat shrink sleeve, various diameters

Reference: AM0551
EAN13: -
UPC: 85369010

Product attributes:

Conductor cross-section: 0.25-0.34mm², 0.50-1.00mm², 0.75-1.50mm², 2.50-4.00mm², 1.50-2.50mm², 6.00-10.00mm², 4.00-6.00mm²

Product features:

Waterproof grade: IP67
Breakthrough voltage: 1000V



Product description:

Shrink ratio: 2:1

Material: Nylon


Solder: lead-free tin

Color	Model designation	Conductor cross-section	A (min.)	L (min.)	B (min.)	B + C (max.)	C (min.)
White	SST-11	0.25-0.35mm ²	2	1.7mm	26 mm		
1.0mm		1.7mm	0.76mm				
Red	SST-21	0.50-1.00mm ²	2	2.7mm	40mm	1.4mm	2.7mm
1.2 mm							
Green	SST-51	0.75-1.50mm ²	2	3.5 mm	40mm	1.5 mm	
3.5 mm							
1.3 mm	Blue	SST-31	1.50-2.50mm ²	2	4.5mm	40mm	2.3 mm
4.5mm							
2.0mm	purple	SST-61	2.50-4.00mm ²	2	5.5mm	40mm	2.5mm
5.5mm							
2.2mm	Yellow	SST-41	4.00-6.00mm ²	2	6.0mm	40mm	3.7mm
6.0mm							
3.4mm	Orange	SST-71	6.00-10.00mm ²	2	7.3mm	30mm	3.8mm
7.3mm							





Low Temperature Solder Sleeve:
Minimum Shrink Temperature: 80°C
Minimum Temperature for Solder to Melt: 138°C

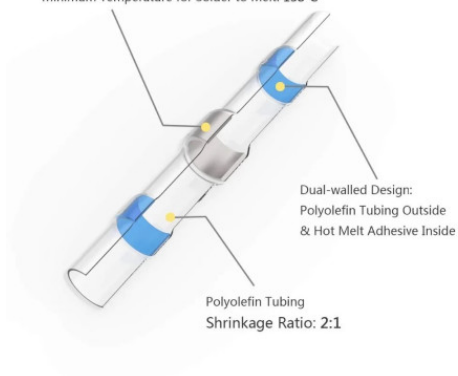

① Strip wire insulation 1/3 inch on both wire ends. Twist the strands together.

② Apply heat while continuously rotating the wire to make the terminal evenly heated.



③ The tubing will shrink down. Solder will melt and flow through the stripped wires.

NOTE: NO Crimping Needed!