

SSR Relay MRA-23D2, 230V AC/ 2A, on DIN rail

Product codes:

Reference: AM1610

EAN13: -

UPC: 85364190

Product features:

Voltage: 3-32 V DC

Waterproof grade: IP20

Max. switching current: 2 A

Max. switching voltage: 250V AC /30 V
DC

Product attributes:

Product description:

The ultra-thin solid-state relay enables switching of AC loads using a DC control signal. Its compact design of just 6.2 mm wide makes it ideal for applications with limited space, such as automation systems, electrical appliances and smart homes.

Maximum contact current: 2A

Input voltage: 3-32V DC

Output voltage: 24-280V AC


Maximum switching frequency: 25 Hz

Insulation voltage between input and output: 2.5 kV

Input reverse polarity protection using a diode

Mounting on a standard 35mm DIN rail

Dimensions: 18 x 6.2 x 78mm

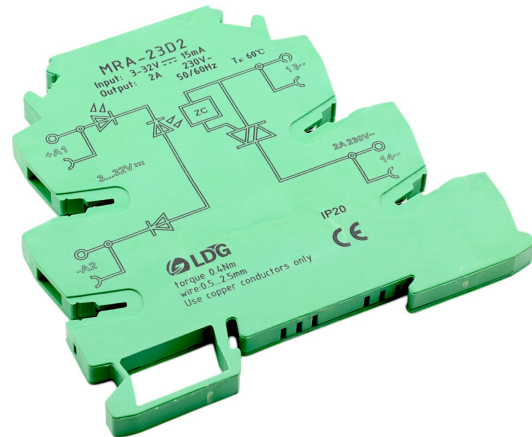

Product gallery:

