

# SP28, IP68 vodootporni konektor za spajanje kabela

Šifra proizvoda: AM6945  
EAN13: -  
HS kód: 85369010

## Varijante proizvoda:

Broj pinova: 2-pin, 3-pin, 4-pin, 5-pin, 6-pin, 7-pin, 9-pin, 10-pin, 12-pin, 14-pin, 16-pin, 19-pin, 22-pin, 24-pin, 26-pin



## Parametri proizvoda:

Materijal kućišta: Plastični  
Pokriti: IP68

## Opis proizvoda:

Vodootporni priključni konektor za žice promjera 11 - 15 mm. Pozlaćeni kontakti.

Tip:	2-pinski	3-pinski	4-pinski	5-pinski	6-pinski	7-pinski	9-pinski	10-pinski	12-pinski	14-pinski	16-pinski	19-pinski	22-pinski	24-pinski	26-pinski
SP28															
Promjer kontakta	3,6x2	3,6x3	3,6x4	2,8x5	2,8x6	2,8x7	1,8x9	1,8x10	1,8x12	1,8x14	1,8x16	1x19	1x22	1x24	1x26
Nazivna struja	45A	45A	45A	25A	25A	25A	10A	10A	10A	10A	10A	5A	5A	5A	5A
Nazivni napon	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V
Otpor kontakta	0,5 mΩ	0,5 mΩ	0,5 mΩ	1mΩ	1mΩ	1mΩ	2mΩ	2mΩ	2mΩ	2mΩ	2mΩ	5mΩ	5mΩ	5mΩ	5mΩ
Otpor izolacije	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ
Maks. presjek vodiča	≤10,17 mm <sup>2</sup>	≤10,17 mm <sup>2</sup>	≤10,17 mm <sup>2</sup>	≤6,15 mm <sup>2</sup>	≤6,15 mm <sup>2</sup>	≤6,15 mm <sup>2</sup>	≤2,54 mm <sup>2</sup>	≤0,78 mm <sup>2</sup>	≤0,78 mm <sup>2</sup>	≤0,78 mm <sup>2</sup>	≤0,78 mm <sup>2</sup>				

Maksimalni napon: 250 V AC


Zaštita: IP68

Radna temperatura: -20 - 110°C

Relativna vlažnost: 90% - 95%

Materijal: Poliamid



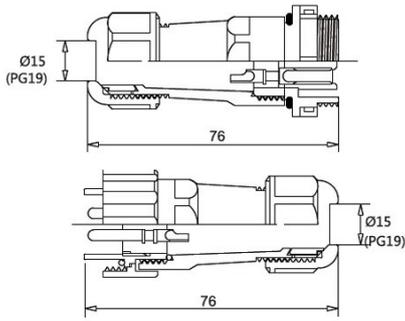

SP28	2	3	4	5	6	7	9
Male contact face view							
Contact diameter	3.6x2	3.6x3	3.6x4	2.8x5	2.8x6	2.8x7	1.8x9
Rated current(A)	45A	45A	45A	25A	25A	25A	10A
Rated voltage(AC.V)	250V	250V	250V	250V	250V	250V	250V
Test voltage(AC.V)	1500V	1500V	1500V	1500V	1500V	1500V	1500V
Contact resistance(mΩ)	0.5	0.5	0.5	1	1	1	2
Insulation resistance(mΩ)	2000	2000	2000	2000	2000	2000	2000
Copper wire square(mm²)	≤10.17	≤10.17	≤10.17	≤6.15	≤6.15	≤6.15	≤2.54

SP28	10	12	14	16	19	22	24	26
Male contact face view								
Contact diameter	1.8x10	1.8x12	1.8x14	1.8x16	1x19	1x22	1x24	1x26
Rated current(A)	10A	10A	10A	10A	5A	5A	5A	5A
Rated voltage(AC.V)	250V	250V	250V	250V	250V	250V	250V	250V
Test voltage(AC.V)	1500V	1500V	1500V	1500V	1500V	1500V	1500V	1500V
Contact resistance(mΩ)	2	2	2	2	5	5	5	5
Insulation resistance(mΩ)	2000	2000	2000	2000	2000	2000	2000	2000
Copper wire square(mm²)	≤2.54	≤2.54	≤2.54	≤2.54	≤0.78	≤0.78	≤0.78	≤0.78