

SP20 ploča, IP68 vodootporan konektor za kablsku vezu, 2-pinski

Šifra proizvoda: AM4737

EAN13: -

HS kód: 85369010

Varijante proizvoda:

Parametri proizvoda:

Trenutno: 25A

Napetost: 250V AC

Broj pinova: 2-pin



Opis proizvoda:

Vodootporni docking konektor za žice promjera 8 - 12 mm. Pozlaćeni kontakti.

Maksimalna struja: 25A




Maksimalni napon: 250V AC

Zaštita: IP68

Radna temperatura: -20 - 110°C

Relativna vlažnost: 90% - 95%

Materijal: poliamid

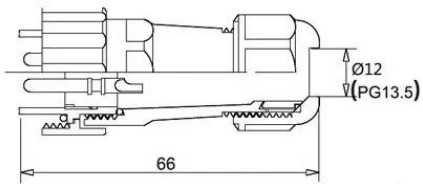

SP20	1	2	3	4	5	6	7	9	10	12	14
Male contact face view											
Contact diameter	3.6x1	2.8x2	2.8x3	2.8x4	2.8x5	1.8x6	1.8x7	1x9	1x10	1x12	1x14
Rated current(A)	25A	25A	25A	25A	25A	10A	10A	5A	5A	5A	5A
Rated voltage(AC.V)	250V	250V	250V	250V	250V	250V	250V	250V	250V	250V	250V
Test voltage(AC.V)	1500V	1500V	1500V	1500V	1500V	1500V	1500V	1500V	1500V	1500V	1500V
Contact resistance(mΩ)	1	1	1	1	1	2	2	5	5	5	5
Insulation resistance(mΩ)	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000
Copper wire square(mm²)	≤6.15	≤6.15	≤6.15	≤6.15	≤6.15	≤2.54	≤2.54	≤0.78	≤0.78	≤0.78	≤0.78