

Toplinski osigurač za lemljenje RY Tf 250V 15A

Šifra proizvoda: AM6313

EAN13: -

HS kód: 85361000

Varijante proizvoda:

Radna temperatura: 73 °C, 75 °C, 80 °C, 95 °C, 100 °C, 105 °C, 113 °C, 110 °C, 115 °C, 120 °C, 121 °C, 125 °C, 130 °C, 133 °C, 135 °C, 140 °C, 142 °C, 145 °C, 150 °C, 152 °C, 155 °C, 157 °C, 165 °C, 167 °C, 172 °C, 175 °C, 185 °C, 192 °C, 195 °C, 200 °C, 205 °C, 210 °C, 216 °C, 240 °C, 250 °C, 255 °C, 280 °C

Parametri proizvoda:

Trenutno: 15 A

Napetost: 250 V AC

Vrsta osigurača: Brzo

Materijal kućišta: Aluminij

Izvršenje: Aksijalni


Opis proizvoda:

Termički osigurač za lemljenje

Nazivni napon 250V AC


Maks. vršna struja: 15 A

Veličina: 4,2x12 mm

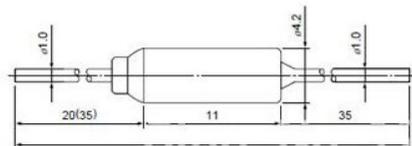


Note: The dimensions for long lead devices are in parentheses.

Before action



At normal operating temperatures, the current is routed from one end of the lead (contact line), the contact, to the other end of the lead (contact line), making the circuit unblocked (and vice versa).

After action



When the device is in normal working condition, the temperature sensor is melted due to the temperature rise, and the temperature sensor is melted, the spring is automatically relaxed, and the contact piece moves under the action of the straight spring, causing the contact piece and the contact line. Disconnected, the circuit is cut off.