

Termoskupljajuća čahura, raznih promjera

Šifra proizvoda: AM0551

EAN13: -

HS kód: 85369010



Varijante proizvoda:

Presjek vodiča: 0,25-0,34 mm², 0,50-1,00 mm², 0,75-1,50 mm², 1,50-2,50 mm², 2,50-4,00 mm², 4,00-6,00 mm², 6,00-10,00 mm²

Parametri proizvoda:

Pokriti: IP67


Probojni napon: 1000 V

Opis proizvoda:

Omjer skupljanja: 2:1

Materijal: najlon


Lem: bezolovni kositar

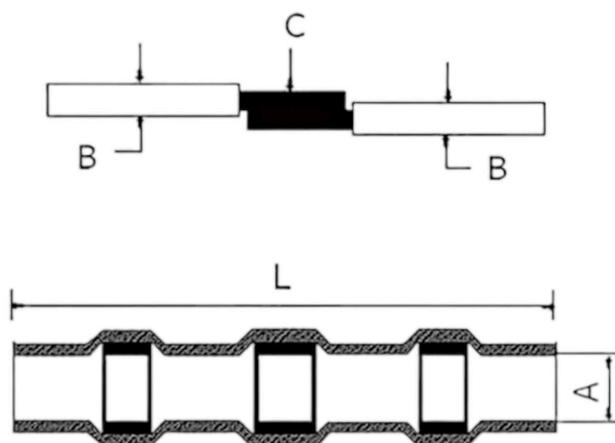

Boja	Oznaka modela	Presjek vodiča	A (min.)	L (min.)	B (min.)	B + C (maks.)	C (min.)
Bijela	SST-11	0,25-0,35 mm ₂	1,7 mm	26 mm	1,0 mm	1,7 mm	0,76 mm
Crvena	SST-21	0,50-1,00 mm ₂	2,7 mm	40 mm	1,4 mm	2,7 mm	1,2 mm
zelena	SST-51	0,75-1,50 mm ₂	3,5 mm	40 mm	1,5 mm	3,5 mm	1,3 mm
Plava	SST-31	1,50-2,50 mm ₂	4,5 mm	40 mm	2,3 mm	4,5 mm	2,0 mm
ljubičasta	SST-61	2,50-4,00 mm ₂	5,5 mm	40 mm	2,5 mm	5,5 mm	2,2 mm
Žuta boja	SST-41	4,00-6,00 mm ₂	6,0 mm	40 mm	3,7 mm	6,0 mm	3,4 mm
narandča	SST-71	6,00-10,00 mm ²	7,3 mm	30 mm	3,8 mm	7,3 mm	3,4 mm



Low Temperature Solder Sleeve:
Minimum Shrink Temperature: 80°C
Minimum Temperature for Solder to Melt: 138°C

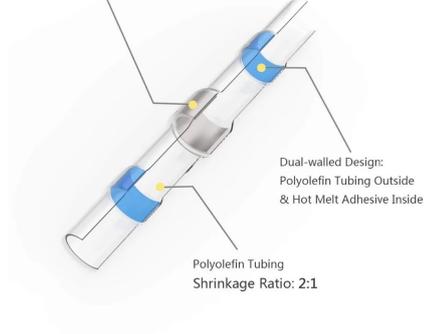

① Strip wire insulation 1/3 inch on both wire ends. Twist the strands together.

② Apply heat while continuously rotating the wire to make the terminal evenly heated.



③ The tubing will shrink down. Solder will melt and flow through the stripped wires.

NOTE: NO Crimping Needed!