

# Fusibile termico a saldare RY Tf 250V 15A

Riferimento: AM6313

EAN13: -

UPC: 85361000

## Caratteristiche del prodotto:

Temperatura di azione: 73 °C, 75 °C, 80 °C, 95 °C, 100 °C, 105 °C, 113 °C, 110 °C, 115 °C, 120 °C, 121 °C, 125 °C, 130 °C, 133 °C, 135 °C, 140 °C, 142 °C, 145 °C, 150 °C, 152 °C, 155 °C, 157 °C, 165 °C, 167 °C, 172 °C, 175 °C, 185 °C, 192 °C, 195 °C, 200 °C, 205 °C, 210 °C, 216 °C, 240 °C, 250 °C, 255 °C, 280 °C



## Caratteristiche del prodotto:

Attuale: 15 A

Tensione: 250 V AC

Tipo di fusibile: Veloce

Materiale dell'alloggiamento: Alluminio

Versione: Assiale


## Descrizione del prodotto:

Fusibile termico a saldare

Tensione nominale 250V AC


Corrente di picco massima: 15 A

Dimensioni: 4,2x12 mm

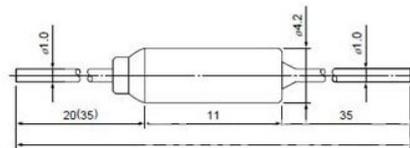


Note: The dimensions for long lead devices are in parentheses.

### Before action



At normal operating temperatures, the current is routed from one end through the metal casing, the contact, to the other end of the lead (contact line), making the circuit unblocked (and vice versa).

### After action



When the device is in normal working condition, the temperature sensor is melted due to the temperature rise, and the temperature sensor is melted, the spring is automatically relaxed, and the contact piece moves under the action of the straight spring, causing the contact piece and the contact line. Disconnected, the circuit is cut off.