

Manșon termocontractabil, diferite diametre

Referință: AM0551

EAN13: -

UPC: 85369010



Atributele produsului:

Secțiunea conductorului: 0,25-0,34 mm², 0,50-1,00 mm²,
0,75-1,50 mm², 1,50-2,50 mm², 2,50-4,00 mm², 4,00-6,00 mm²,
6,00-10,00 mm²

Caracteristicile produsului:

Acoperi: IP67


Tensiune de străpungere: 1000 V

Descriere produs:

Raport de contracție: 2:1

Material: nailon


Lipire: staniu fără plumb

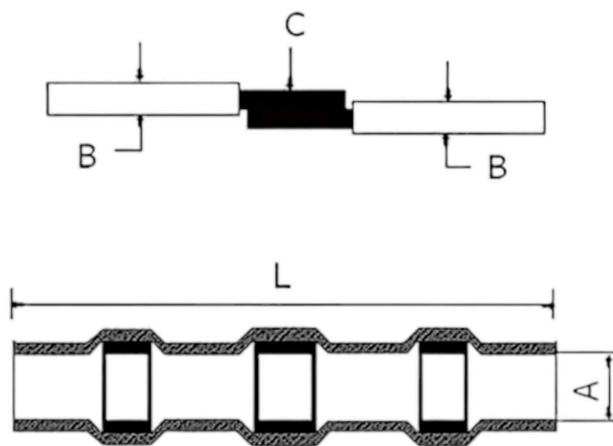

Culoare	Denumirea modelului	Secțiunea conductorului	A (min.)	L (min.)	B (min.)	B + C (max.)	C (min.)
alb	SST-11	0,25-0,35 mm ₂	1,7 mm	26 mm	1,0 mm	1,7 mm	0,76 mm
roșu	SST-21	0,50-1,00 mm ₂	2,7 mm	40 mm	1,4 mm	2,7 mm	1,2 mm
Verde	SST-51	0,75-1,50 mm ₂	3,5 mm	40 mm	1,5 mm	3,5 mm	1,3 mm
Albastru	SST-31	1,50-2,50 mm ₂	4,5 mm	40 mm	2,3 mm	4,5 mm	2,0 mm
Violet	SST-61	2,50-4,00 mm ₂	5,5 mm	40 mm	2,5 mm	5,5 mm	2,2 mm
Galben	SST-41	4,00-6,00 mm ₂	6,0 mm	40 mm	3,7 mm	6,0 mm	3,4 mm
Portocale	SST-71	6,00-10,00 mm ²	7,3 mm	30 mm	3,8 mm	7,3 mm	3,4 mm



Low Temperature Solder Sleeve:
 Minimum Shrink Temperature: 80°C
 Minimum Temperature for Solder to Melt: 138°C

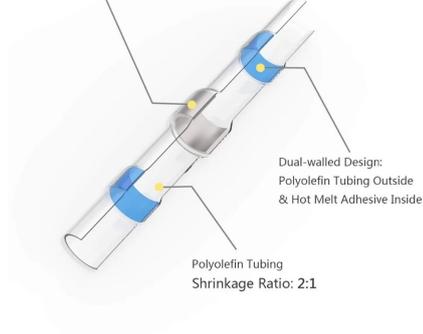

- ① Strip wire insulation 1/3 inch on both wire ends. Twist the strands together.
- ② Apply heat while continuously rotating the wire to make the terminal evenly heated.



- ③ The tubing will shrink down. Solder will melt and flow through the stripped wires.
- NOTE: NO Crimping Needed!**