

SP28, vodoodporni konektor za kabelsko spajanje IP68

Koda izdelka: AM6945
 EAN13: -
 HS kód: 85369010



Variante izdelkov:

Število zatičev: 2-pin, 3-pin, 4-pin, 5-pin, 6-pin, 7-pin, 9-pin, 10-pin, 12-pin, 14-pin, 16-pin, 19-pin, 22-pin, 24-pin, 26-pin

Parametri izdelka:

Material ohišja: Plastika
 Pokritost: IP68

Opis izdelka:

Vodoodporni priklopni konektor za žice s premerom 11 - 15 mm. Pozlačeni kontakti.

Tip:	2-pinski	3-pinski	4-pinski	5-pinski	6-pinski	7-pinski	9-pinski	10-pinski	12-pinski	14-pinski	16-pinski	19-pinski	22-pinski	24-pinski	26-pinski
SP28								ki							
Premer stika	3,6x2	3,6x3	3,6x4	2,8x5	2,8x6	2,8x7	1,8x9	1,8x10	1,8 x 12	1,8 x 14	1,8x16	1x19	1x22	1x24	1x26
Nazivni tok	45A	45A	45A	25A	25A	25A	10A	10A	10A	10A	10A	5A	5A	5A	5A
Nazivna napetost	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V
Kontakt na upor	0,5 mΩ	0,5 mΩ	0,5 mΩ	1mΩ	1mΩ	1mΩ	2mΩ	2mΩ	2mΩ	2mΩ	2mΩ	5mΩ	5mΩ	5mΩ	5mΩ
Izolacijska upornost	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ
Maks. presek vodnika	≤10,17 mm ²	≤10,17 mm ²	≤10,17 mm ²	≤6,15 mm ²	≤6,15 mm ²	≤6,15 mm ²	≤2,54 mm ²	≤0,78 mm ²	≤0,78 mm ²	≤0,78 mm ²	≤0,78 mm ²				

Največja napetost: 250 V AC


Zaščita: IP68

Delovna temperatura: -20 - 110°C

Relativna vlažnost: 90 % - 95 %

Material: Poliamid



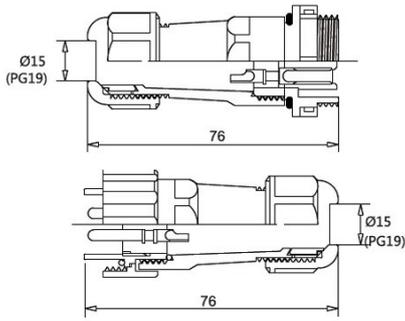

SP28	2	3	4	5	6	7	9
Male contact face view							
Contact diameter	3.6x2	3.6x3	3.6x4	2.8x5	2.8x6	2.8x7	1.8x9
Rated current(A)	45A	45A	45A	25A	25A	25A	10A
Rated voltage(AC.V)	250V	250V	250V	250V	250V	250V	250V
Test voltage(AC.V)	1500V	1500V	1500V	1500V	1500V	1500V	1500V
Contact resistance(mΩ)	0.5	0.5	0.5	1	1	1	2
Insulation resistance(mΩ)	2000	2000	2000	2000	2000	2000	2000
Copper wire square(mm²)	≤10.17	≤10.17	≤10.17	≤6.15	≤6.15	≤6.15	≤2.54

SP28	10	12	14	16	19	22	24	26
Male contact face view								
Contact diameter	1.8x10	1.8x12	1.8x14	1.8x16	1x19	1x22	1x24	1x26
Rated current(A)	10A	10A	10A	10A	5A	5A	5A	5A
Rated voltage(AC.V)	250V	250V	250V	250V	250V	250V	250V	250V
Test voltage(AC.V)	1500V	1500V	1500V	1500V	1500V	1500V	1500V	1500V
Contact resistance(mΩ)	2	2	2	2	5	5	5	5
Insulation resistance(mΩ)	2000	2000	2000	2000	2000	2000	2000	2000
Copper wire square(mm²)	≤2.54	≤2.54	≤2.54	≤2.54	≤0.78	≤0.78	≤0.78	≤0.78