

SP20, vodoodporni kabelski konektor IP68

Koda izdelka: AM1454
EAN13: -
HS kód: 85369010

Variante izdelkov:

Število zatičev: 2-pin, 3-pin, 4-pin, 5-pin, 6-pin, 7-pin, 9-pin, 10-pin, 12-pin, 14-pin



Parametri izdelka:

Material ohišja: Plastika
Pokritost: IP68
Namestitev: S spajkanjem



Opis izdelka:

Vodoodporni priklopni konektor za žice s premerom 8 - 12 mm. Pozlačeni kontakti.

Tip: SP20	2-pinski	3-pinski	4-pinski	5-pinski	6-pinski	7-pinski	9-pinski	10-pinski	12-pinski	14-pinski
Premier stika	2,8 mm	2,8 mm	2,8 mm	2,8 mm	1,8 mm	1,8 mm	1 mm	1 mm	1 mm	1 mm
Nazivni tok	25A	25A	25A	25A	10A	10A	5A	5A	5A	5A
Nazivna napetost	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V
Kontaktna upornost	1mΩ	1mΩ	1mΩ	1mΩ	2mΩ	2mΩ	5mΩ	5mΩ	5mΩ	5mΩ
Izolacijska upornost	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ
Maks. presek vodnika	≤6,15 mm ²	≤6,15 mm ²	≤6,15 mm ²	≤6,15 mm ²	≤2,54 mm ²	≤2,54 mm ²	≤0,78 mm ²	≤0,78 mm ²	≤0,78 mm ²	≤0,78 mm ²

Največji tok: 25A
Največja napetost: 250 V AC
Zaščita: IP68
Delovna temperatura: -20 - 110°C
Relativna vlažnost: 90 % - 95 %
Material: Poliamid
Vsebina paketa: moški + ženski SP20



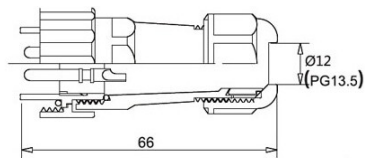

SP20	1	2	3	4	5	6	7	8	9	10	11	12
Male contact face view												
Contact diameter	3.6x1	2.8x2	2.8x3	2.8x4	2.8x5	1.8x6	1.8x7	1x9	1x10	1x12	1x14	
Rated current(A)	25A	25A	25A	25A	25A	10A	10A	5A	5A	5A	5A	
Rated voltage(AC.V)	250V	250V	250V	250V	250V	250V	250V	250V	250V	250V	250V	
Test voltage(AC.V)	1500V	1500V	1500V	1500V	1500V	1500V	1500V	1500V	1500V	1500V	1500V	
Contact resistance(mΩ)	1	1	1	1	1	2	2	5	5	5	5	
Insulation resistance(mΩ)	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	
Copper wire square(mm²)	≤6.15	≤6.15	≤6.15	≤6.15	≤6.15	≤2.54	≤2.54	≤0.78	≤0.78	≤0.78	≤0.78	