

SP20 za montažo na ploščo, vodoodporen kablski konektor IP68

Koda izdelka: AM4737
EAN13: -
HS kód: 85369010



Variante izdelkov:

Število zatičev: 2-pin, 3-pin, 4-pin, 5-pin, 6-pin, 7-pin, 9-pin, 10-pin, 12-pin, 14-pin

Parametri izdelka:

Material ohišja: Plastika
Pokritost: IP68
Namestitev: S spajkanjem





Opis izdelka:

Vodoodporni priklopni konektor za žice s premerom 8 - 12 mm. Pozlačeni kontakti.

Tip: SP20	2-pinski	3-pinski	4-pinski	5-pinski	6-pinski	7-pinski	9-pinski	10-pinski	12-pinski	14-pinski
Premer stika	2,8 mm	2,8 mm	2,8 mm	2,8 mm	1,8 mm	1,8 mm	1 mm	1 mm	1 mm	1 mm
Nazivni tok	25A	25A	25A	25A	10A	10A	5A	5A	5A	5A
Nazivna napetost	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V	250 V
Kontaktna upornost	1mΩ	1mΩ	1mΩ	1mΩ	2mΩ	2mΩ	5mΩ	5mΩ	5mΩ	5mΩ
Izolacijska upornost	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ	2000 mΩ
Maks. presek vodnika	≤6,15 mm ²	≤6,15 mm ²	≤6,15 mm ²	≤6,15 mm ²	≤2,54 mm ²	≤2,54 mm ²	≤0,78 mm ²	≤0,78 mm ²	≤0,78 mm ²	≤0,78 mm ²

Največji tok: 25A
Največja napetost: 250 V AC
Zaščita: IP68
Delovna temperatura: -20 - 110°C
Relativna vlažnost: 90 % - 95 %
Material: Poliamid
Vsebina paketa: moški + ženski SP20



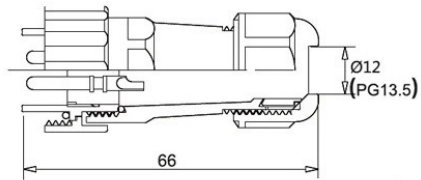

SP20	1	2	3	4	5	6	7	9	10	12	14
Male contact face view											
Contact diameter	1.6x1	2.8x2	2.8x3	2.8x4	2.8x5	1.8x6	1.8x7	1x9	1x10	1x12	1x14
Rated current(A)	25A	25A	25A	25A	25A	10A	10A	5A	5A	5A	5A
Rated voltage(AC.V)	250V	250V	250V	250V	250V	250V	250V	250V	250V	250V	250V
Test voltage(AC.V)	1500V	1500V	1500V	1500V	1500V	1500V	1500V	1500V	1500V	1500V	1500V
Contact resistance(mΩ)	1	1	1	1	1	2	2	5	5	5	5
Insulation resistance(mΩ)	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000
Copper wire square(mm²)	≤6.15	≤6.15	≤6.15	≤6.15	≤6.15	≤2.54	≤2.54	≤0.78	≤0.78	≤0.78	≤0.78