

SP28, IP68 vodeodolný káblový spojovací konektor

Kód produktu: AM6945
 EAN13: -
 HS kód: 85369010



Varianty produktu:

Počet pinov: 2-pin, 3-pin, 4-pin, 5-pin, 6-pin, 7-pin, 9-pin, 10-pin, 12-pin, 14-pin, 16-pin, 19-pin, 22-pin, 24-pin, 26-pin

Parametry produktu:

Materiál puzdra: Plast
 Krytie: IP68

Popis produktu:

Vodeodolný dokovacie konektor pre vodiče s priemerom 11 - 15mm. Pozlátené kontakty.

Typ: SP28	2-pin	3-pin	4-pin	5-pin	6-pin	7-pin	9-pin	10-pin	12-pin	14-pin	16-pin	19-pin	22-pin	24-pin	26-pin
Priemer kontaktov	3.6x2	3.6x3	3.6x4	2.8x5	2.8x6	2.8x7	1.8x9	1.8x10	1.8x12	1.8x14	1.8x16	1x19	1x22	1x24	1x26
Menovitý prúd	45A	45A	45A	25A	25A	25A	10A	10A	10A	10A	10A	5A	5A	5A	5A
Menovité napätie	250V	250V	250V	250V	250V	250V	250V	250V	250V	250V	250V	250V	250V	250V	250V
Odpor kontaktov	0.5mΩ	0.5mΩ	0.5mΩ	1mΩ	1mΩ	1mΩ	2mΩ	2mΩ	2mΩ	2mΩ	2mΩ	5mΩ	5mΩ	5mΩ	5mΩ
Izolačný odpor	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ	2000mΩ
Max. prierez vodiča	≤10.17 mm ²	≤10.17 mm ²	≤10.17 mm ²	≤6.15m m ²	≤6.15m m ²	≤6.15m m ²	≤2.54m m ²	≤0.78m m ²	≤0.78m m ²	≤0.78m m ²	≤0.78m m ²				

Maximálne napätie: 250V AC


Krytie: IP68

Pracovná teplota: -20 - 110 °C

Relatívna vlhkosť: 90% - 95%

Materiál: Polyamid



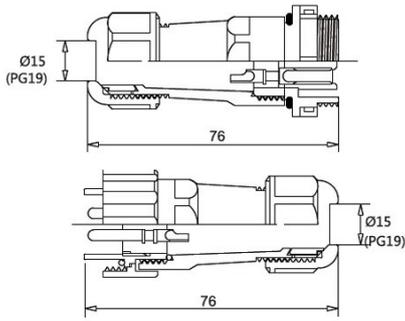

SP28	2	3	4	5	6	7	9
Male contact face view							
Contact diameter	3.6x2	3.6x3	3.6x4	2.8x5	2.8x6	2.8x7	1.8x9
Rated current(A)	45A	45A	45A	25A	25A	25A	10A
Rated voltage(AC.V)	250V	250V	250V	250V	250V	250V	250V
Test voltage(AC.V)	1500V	1500V	1500V	1500V	1500V	1500V	1500V
Contact resistance(mΩ)	0.5	0.5	0.5	1	1	1	2
Insulation resistance(mΩ)	2000	2000	2000	2000	2000	2000	2000
Copper wire square(mm²)	≤10.17	≤10.17	≤10.17	≤6.15	≤6.15	≤6.15	≤2.54

SP28	10	12	14	16	19	22	24	26
Male contact face view								
Contact diameter	1.8x10	1.8x12	1.8x14	1.8x16	1x19	1x22	1x24	1x26
Rated current(A)	10A	10A	10A	10A	5A	5A	5A	5A
Rated voltage(AC.V)	250V	250V	250V	250V	250V	250V	250V	250V
Test voltage(AC.V)	1500V	1500V	1500V	1500V	1500V	1500V	1500V	1500V
Contact resistance(mΩ)	2	2	2	2	5	5	5	5
Insulation resistance(mΩ)	2000	2000	2000	2000	2000	2000	2000	2000
Copper wire square(mm²)	≤2.54	≤2.54	≤2.54	≤2.54	≤0.78	≤0.78	≤0.78	≤0.78