

# SP20, IP68 vodeodolný káblový spojovací konektor

Kód produktu: AM1454

EAN13: -

HS kód: 85369010

## Varianty produktu:

Počet pinov: 2-pin, 3-pin, 4-pin, 5-pin, 6-pin, 7-pin, 9-pin, 10-pin, 12-pin, 14-pin



## Parametry produktu:

Materiál puzdra: Plast

Krytie: IP68

Inštalácia: Spájkovaním

## Popis produktu:

Vodeodolný dokovacia konektor pre vodiče s priemerom 8 - 12mm. Pozlátené kontakty.

Typ: SP20	2-pin	3-pin	4-pin	5-pin	6-pin	7-pin	9-pin	10-pin	12-pin	14-pin
Priemer kontaktov	2.8mm	2.8mm	2.8mm	2.8mm	1.8mm	1.8mm	1mm	1mm	1mm	1mm
Menovitý prúd	25A	25A	25A	25A	10A	10A	5A	5A	5A	5A
Menovité napätie	250V									
Odpor kontaktov	1mΩ	1mΩ	1mΩ	1mΩ	2mΩ	2mΩ	5mΩ	5mΩ	5mΩ	5mΩ
Izolačný odpor	2000mΩ									
Max. prierez vodiča	$\leq 6.15\text{mm}^2$	$\leq 6.15\text{mm}^2$	$\leq 6.15\text{mm}^2$	$\leq 6.15\text{mm}^2$	$\leq 2.54\text{mm}^2$	$\leq 2.54\text{mm}^2$	$\leq 0.78\text{mm}^2$	$\leq 0.78\text{mm}^2$	$\leq 0.78\text{mm}^2$	$\leq 0.78\text{mm}^2$

Maximálny prúd: 25A

Maximálne napätie: 250V AC

Krytie: IP68



Pracovná teplota: -20 - 110 °C

Relatívna vlhkosť: 90% - 95%

Materiál: Polyamid

Obsah balenia: samec + samica SP20



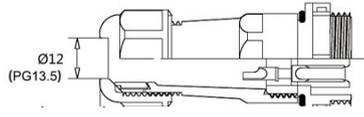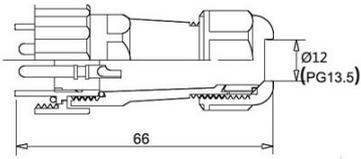

SP20	1	2	3	4	5	6	7	8	9	10	11	12
Male contact face view												
Contact diameter	3.6x1	2.8x2	2.8x3	2.8x4	2.8x5	1.8x6	1.8x7	1x9	1x10	1x12	1x14	
Rated current(A)	25A	25A	25A	25A	25A	10A	10A	5A	5A	5A	5A	
Rated voltage(AC.V)	250V											
Test voltage(AC.V)	1500V											
Contact resistance(mΩ)	1	1	1	1	1	2	2	5	5	5	5	
Insulation resistance(mΩ)	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	
Copper wire square(mm <sup>2</sup> )	≤6.15	≤6.15	≤6.15	≤6.15	≤6.15	≤2.54	≤2.54	≤0.78	≤0.78	≤0.78	≤0.78	