

SP20 panelový, IP68 vodeodolný káblový spojovací konektor

Kód produktu: AM4737

EAN13: -

HS kód: 85369010



Varianty produktu:

Počet pinov: 2-pin, 3-pin, 4-pin, 5-pin, 6-pin, 7-pin, 9-pin, 10-pin, 12-pin, 14-pin

Parametry produktu:

Materiál puzdra: Plast

Krytie: IP68

Inštalácia: Spájkovaním

Popis produktu:

Vodeodolný dokovacia konektor pre vodiče s priemerom 8 - 12mm. Pozlátené kontakty.

| Typ: SP20 | 2-pin | 3-pin | 4-pin | 5-pin | 6-pin | 7-pin | 9-pin | 10-pin | 12-pin | 14-pin |
|---------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Priemer kontaktov | 2.8mm | 2.8mm | 2.8mm | 2.8mm | 1.8mm | 1.8mm | 1mm | 1mm | 1mm | 1mm |
| Menovitý prúd | 25A | 25A | 25A | 25A | 10A | 10A | 5A | 5A | 5A | 5A |
| Menovité napätie | 250V |
| Odpor kontaktov | 1mΩ | 1mΩ | 1mΩ | 1mΩ | 2mΩ | 2mΩ | 5mΩ | 5mΩ | 5mΩ | 5mΩ |
| Izolačný odpor | 2000mΩ |
| Max. prierez vodiča | $\leq 6.15\text{mm}^2$ | $\leq 6.15\text{mm}^2$ | $\leq 6.15\text{mm}^2$ | $\leq 6.15\text{mm}^2$ | $\leq 2.54\text{mm}^2$ | $\leq 2.54\text{mm}^2$ | $\leq 0.78\text{mm}^2$ | $\leq 0.78\text{mm}^2$ | $\leq 0.78\text{mm}^2$ | $\leq 0.78\text{mm}^2$ |

Maximálny prúd: 25A

Maximálne napätie: 250V AC

Krytie: IP68


Pracovná teplota: -20 - 110 °C

Relatívna vlhkosť: 90% - 95%

Materiál: Polyamid

Obsah balenia: samec + samica SP20



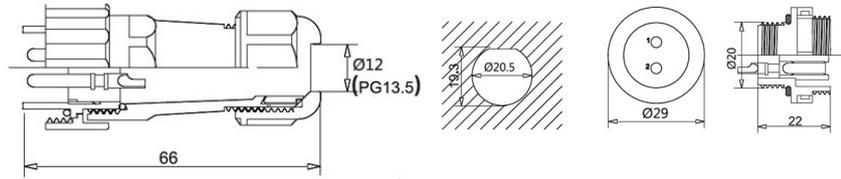

| SP20 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 9 | 10 | 12 | 14 |
|---------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Male contact face view | | | | | | | | | | | |
| Contact diameter | 1.6x1 | 2.8x2 | 2.8x2 | 2.8x4 | 2.8x5 | 1.8x5 | 1.8x7 | 1x9 | 1x10 | 1x12 | 1x14 |
| Rated current(A) | 25A | 25A | 25A | 25A | 25A | 10A | 10A | 5A | 5A | 5A | 5A |
| Rated voltage(AC.V) | 250V |
| Test voltage(AC.V) | 1500V |
| Contact resistance(mΩ) | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 5 | 5 | 5 | 5 |
| Insulation resistance(mΩ) | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 |
| Copper wire square(mm²) | ≤6.15 | ≤6.15 | ≤6.15 | ≤6.15 | ≤6.15 | ≤2.54 | ≤2.54 | ≤0.78 | ≤0.78 | ≤0.78 | ≤0.78 |