

Drossel CDRH74 470, 47uH

Produktkod: AM8728

EAN13: -

HS-kod: 85411000

Produktvarianter:

Produktparametrar:

Aktuellt: 880mA

Tolerans: 20%

Induktans: 47uH

RDC-motstånd: 0.26 Ohm



Produktbeskrivning:

SMD-drossel

Induktans: 47uH

Tolerans: 20 %.

Testfrekvens: 2,52 Mhz


Maximal likström: 880 mA

Maximalt DC-motstånd: 0,26 Ohm

Temperaturområde: -40 till +85 °C

Montering: SMD

Vikt: 0,78g

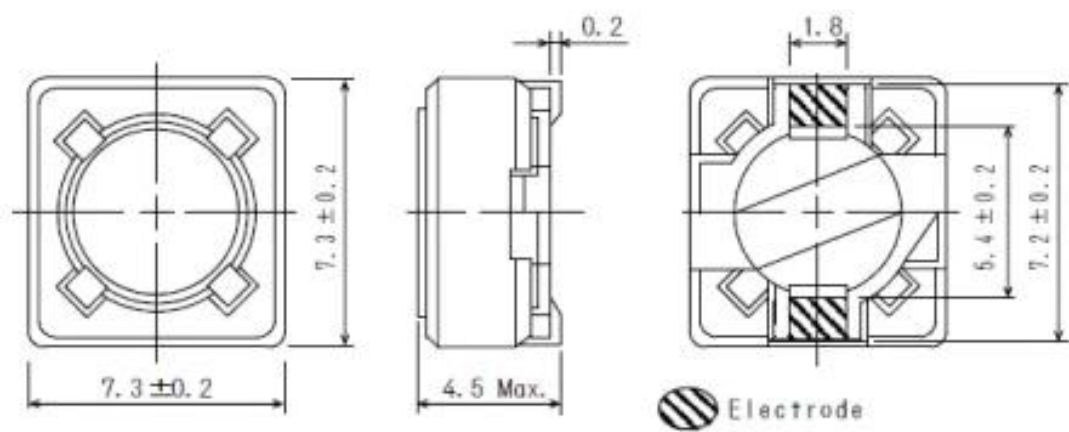

Land pattern and Schematics - [mm]

