

# Multi-turn-potentiometer 3590S-2, 2W

## Produktkoder:

Produktkod: AM1506

EAN13: -

HS-kod: 85334090

## Produktparametrar:


Temperaturkoefficient:  $\pm 50$  ppm/ $^{\circ}\text{C}$

Tolerans: 5%

Prestanda: 2 W

Täckning: IP40

Antal stift: 3-pin

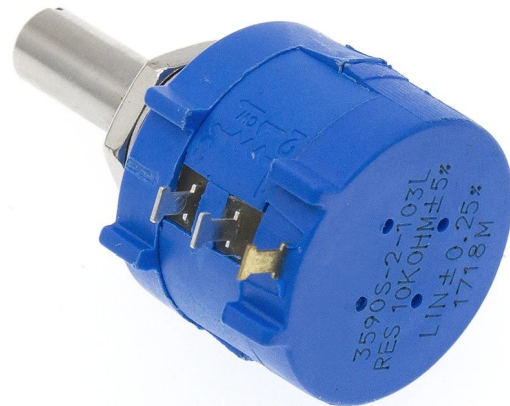

## Produktvarianter:

Motstånd: 101, 100 Ohm, 100R, 201, 200 Ohm, 200R, 501, 500 Ohm, 500R, 102, 1 kOhm, 1K, 202, 2 kOhm, 2K, 502, 5 kOhm, 5K, 103, 10 kOhm, 10K, 203, 20 kOhm, 20K, 503, 50 kOhm, 50K, 104, 100 kOhm, 100K

## Produktbeskrivning:

Linjär potentiometer, multisvarv med  $\pm 5$  % tolerans.

Pd - Effektförlust: 2 W

Antal varv: 10 ( $3600^{\circ}$ )

Typ av potentiometer: axiell

Typ av spår: tråd

Potentiometerns egenskaper: precision

Linjäritetstolerans:  $\pm 0,25$  %.

---

Min. isoleringsmotstånd: 1000mOhm

Mått: 39,3 x 18,6 mm

Axellängd: 12,6 mm, axeldiameter: 6,35 mm

Monteringshålsdiameter: 9,5 mm (mutterinfästning)

Typbeteckning:

3590S-2-101L (100 Ohm)

3590S-2-201L (200 Ohm)

3590S-2-501L (500 Ohm)

3590S-2-102L (1 kOhm)

3590S-2-202L (2 kOhm)

3590S-2-502L (5 kOhm)

3590S-2-103L (10 kOhm)

3590S-2-203L (20 kOhm)

3590S-2-503L (50 kOhm)

3590S-2-104L (100 kOhm)

## Galerie:

