

# Termisk säkring för lödning RY Tf 250V 15A

Produktkod: AM6313

EAN13: -

HS-kod: 85361000

## Produktvarianter:

Åtgärdstemperatur: 73 °C, 75 °C, 80 °C, 95 °C, 100 °C, 105 °C, 113 °C, 110 °C, 115 °C, 120 °C, 121 °C, 125 °C, 130 °C, 133 °C, 135 °C, 140 °C, 142 °C, 145 °C, 150 °C, 152 °C, 155 °C, 157 °C, 165 °C, 167 °C, 172 °C, 175 °C, 185 °C, 192 °C, 195 °C, 200 °C, 205 °C, 210 °C, 216 °C, 240 °C, 250 °C, 255 °C, 280 °C

## Produktparametrar:

Aktuellt: 15 A

Spänning: 250 V AC

Typ av säkring: Snabb

Material för hölje: Aluminium

Version: Axial


## Produktbeskrivning:

Termisk säkring lödning

Nominell spänning 250V AC


Max. toppström: 15 A

Storlek: 4.2x12mm

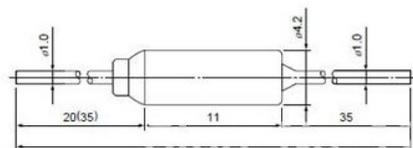


Note: The dimensions for long lead devices are in parentheses.

### Before action



At normal operating temperatures, the current is routed from one end through the metal casing, the contact, to the other end of the lead (contact line), making the circuit unblocked (and vice versa).

### After action



When the device is in normal working condition, the temperature sensor is melted due to the temperature rise, and the temperature sensor is melted, the spring is automatically relaxed, and the contact piece moves under the action of the straight spring, causing the contact piece and the contact line. Disconnected, the circuit is cut off.