

# Potenciometr BC1-50W

Kód produktu: AM1946

EAN13: -

HS kód: 85334090

## Varianty produktu:

Odpor: 2 Ohm, 2R0, 5 Ohm, 5R, 10 Ohm, 10R, 20 Ohm, 20R, 30 Ohm, 30R, 50 Ohm, 50R, 100 Ohm, 100R, 150 Ohm, 150R, 200 Ohm, 200R, 300 Ohm, 300R, 500 Ohm, 500R, 1 kOhm, 1K0, 2 kOhm, 2K0, 5 kOhm, 5K0



## Parametry produktu:

Tolerance: 10%

Výkon: 50 W

Počet pinů: 3-pin

## Popis výrobku:



Potenciometr s tolerancí  $\pm 10\%$ .

Maximální napětí: 315 V AC, 220V DC

Pd - Ztrátový výkon: 50W

Počet otáček: 1 (280°)  $\pm 10^\circ$

Provozní teplota: -55° - 315°C

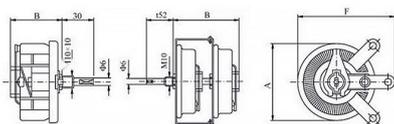

Model	Power (W)	Resistance Range (R)	Dimensions					Precision (%)	Temperature coeff.	
			A	B	D	E	F	G		
BC1	25W	1Ω-1K	44	40	6		50	25	10%	±250ppm
	50W	1Ω-2K	66	42	6		75	25		
	100W	1Ω-3K	84	44	6		102	25		
	150W	1Ω-3K	106	54	6		120	25		
	200W	1Ω-3K	106	54	6		120	25		
	300W	1Ω-3K	158	90	10	145	170	45		
	500W	1Ω-3K	206	90	10	192	215	60		
	50W*2	1Ω-4K	85	110	6		75	52		
	100W*2	1Ω-6K	115	145	6		102	52		
	150W*2	1Ω-6K	135	155	6		120	52		
	300W*2	1Ω-6K	180	165	10	145	170	38		
	500W*2	1Ω-6K	220	165	10	192	215	38		
	150W*3	1Ω-9K	135	220	6	100	120	25		
	300W*3	1Ω-9K	180	275	10	145	170	38		
	500W*3	1Ω-9K	220	295	10	192	215	38		
	500W*4	1Ω-12K	220	370	10	192	215	38		

