


# Connector for 10A switches with mounting diameter 22 mm, 4pin

## Product codes:

Reference: AM3996

EAN13: -

UPC: 85366990

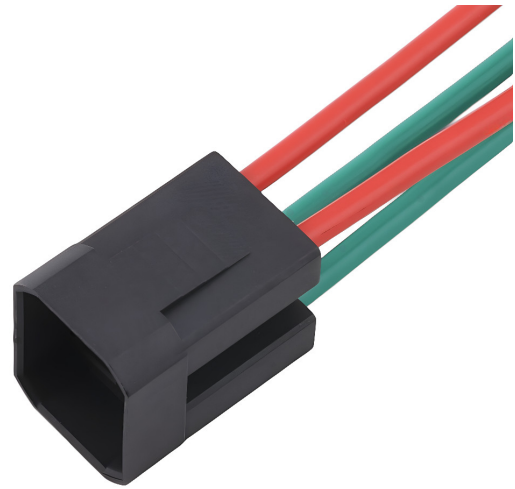

## Product features:

Current: 10 A

Rated voltage: 250 V AC

Waterproof grade: IP20

Number of pins: 4-pin

## Product attributes:

## Product description:

The practical 4-pin connector with wires is designed for quick and reliable connection of metal buttons and switches with a 22 mm mounting hole. It allows for a clean and tidy installation without the need for soldering directly to the switch contacts, increases the mechanical resistance of the connection and makes it easier to replace the button if necessary.

## Technical specifications

- Connector type: 22mm switch plug connector
  - Number of pins: 4 (suitable for switches with and without LED backlight)
  - Rated current: 10 A
  - Rated voltage: 250 V AC
  - Wire cross-section: 0.75 mm<sup>2</sup> (tinned copper core)
  - Wire length: 150 mm
  - Wire colors: color coding for easier wiring
  - Connector body material: durable plastic (PA/nylon) with good insulating properties
  - Temperature range: -20°C to +85°C
  - Protection: IP20 – intended for installation in a dry, protected
-

environment or in a box

- Connector body dimensions: 24 × 18 × 25 mm (W × H × D)
- Weight: 20g

### **Functions and features**

- Allows quick connection of switches without soldering directly to the terminals.
- The firm mechanical attachment of the contacts prevents loosening during vibrations.
- Pre-assembled wires reduce installation time and minimize wiring errors.
- Suitable for buttons with LED ring and for classic mechanical switches.
- Compatible with commonly used 22mm metal buttons (momentary and latching types).

### **Ideal for**

- Auto-moto installations and additional control panels.
- Control panels for machines and production lines.
- DIY projects, electronic modules and switchboards.
- Control of lighting, power circuits, pumps and other loads according to switch parameters.

### **Package contents**

- 1× 4-pin connector with wires for switches with a mounting diameter of 22 mm

### **Why choose this product?**

- It will significantly speed up the installation of switches and make the wiring clearer.
- Minimizes the risk of poor contact, cold joints and mechanical damage to wires.
- Universal compatibility with popular 22mm LED backlit buttons.
- Durable materials ensure a long service life even with frequent use.

### **Product gallery:**

