

# Potenciometar BC1-50W

## Šifre proizvoda:

Šifra proizvoda: AM1946

EAN13: -

HS kód: 85334090

## Parametri proizvoda:

Tolerancija: 10%

Izvođenje: 50 W

Broj pinova: 3-pin

## Varijante proizvoda:

Otpornost: 2 Ohm, 2R0, 5 Ohm, 5R, 10 Ohm, 10R, 20 Ohm, 20R, 30 Ohm, 30R, 50 Ohm, 50R, 100 Ohm, 100R, 150 Ohm, 150R, 200 Ohm, 200R, 300 Ohm, 300R, 500 Ohm, 500R, 1 kOhm, 1K0, 2 kOhm, 2K0, 5 kOhm, 5K0

## Opis proizvoda:

Potenciometar s tolerancijom  $\pm 10\%$ .


Maksimalni napon: 315 V AC, 220 V DC


Pd - Gubitak snage: 50W

Broj zavoja: 1 (280°)  $\pm 10^\circ$

Radna temperatura: -55° - 315°C

## Galerija:

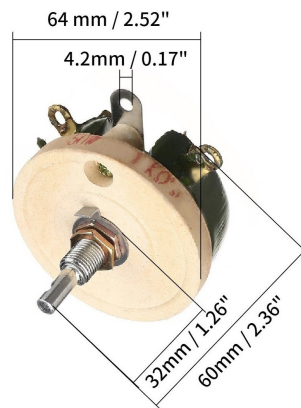



Model	Type	Dimensions					PCU	Speed
		A	B	D	E	F		
20W	102.1A	40	40	4	50	25		
30W	102.3A	40	42	4	50	25		
30W	102.3A	40	44	4	50	25		
30W	102.3A	40	50	4	50	25		
200W	102.3A	110	54	4	130	25		
300W	102.3A	120	50	10	145	40		
300W	102.3A	204	90	10	232	225	40	
300W	102.4A	85	110	4	75	30		
100W	102.4A	115	145	4	110	30	10%	
100W	102.4A	115	150	4	110	30		
100W	102.4A	105	105	10	145	150	30	
100W	102.4A	105	100	10	140	150	30	
100W	102.4A	115	120	4	140	150	25	
100W	102.4A	115	120	4	140	150	25	
100W	102.4A	140	215	10	190	150	30	
100W	102.4A	220	200	10	240	175	40	
100W	102.4A	220	190	10	232	225	30	