

# Tidsfördröjningsrelä 0.1s - 1 timme, FC-31, 12V

Produktkod: AM9172  
 EAN13: -  
 HS-kod: 85364190



## Produktvarianter:

## Produktparametrar:

Spänning: 12 V DC  
 Täckning: IP20

## Produktbeskrivning:

När reläet är anslutet till strömförsörjningen slår det på efter en inställd tidsfördröjning. Fördröjningsinställning med SMD-trimmer. NO- och NC-anslutning.

Justerbar omkopplingstid 100 ms till 1 timme

Potentialfri reläkontakt

Försörjningsspänning: 12V DC

Driftström: 100 mA

Songe SRD-12VDC-SL-C relä typ.



Max. kopplingsspänning: 250V AC, 30V DC

Max. kopplingsström: 10 A

Driftstemperatur: -10 till 60 °C (-10 till 60 °F)


Mått: 56x30x18 mm

Vikt: 18g

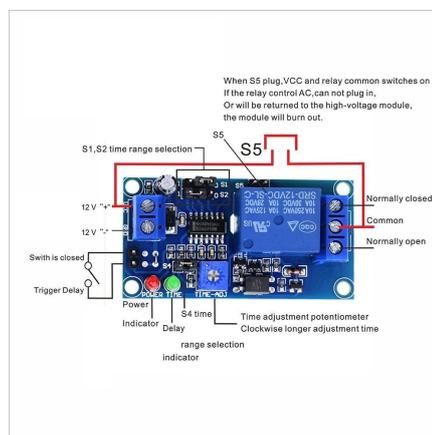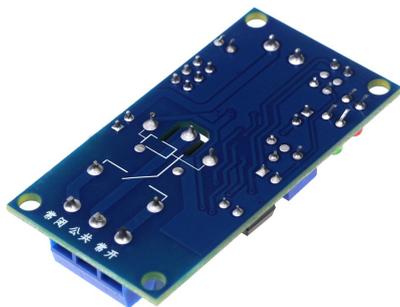


### Delay time selection method:


S1 position	S2 position	Not insert S4 time	Insert S4 time	As shown
0	1	0.13S-1.3S	1.5S-14.5S	
1	0	0.5S-5.2S	6S-58S	
0	0	4.4S-42S	48S-463S	
1	1	38S-340S	389S-3700S	

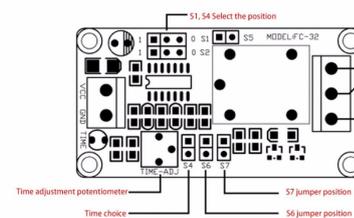


## How the relay works



When the relay coil at both ends without voltage or voltage is not enough, the relay COM and NC side connected



When the relay coil at both ends reaches the pull-in voltage, the relay COM and NO side connected



When the relay switch is closed, the device has a voltage at both ends, can work properly, switch off does not work