

Multi-turn-potentiometer 3590S-2, 2W

Produktkoder:

Produktkode: AM1506

EAN13: -

HS-kode: 85334090

Produktparametre:


Temperaturkoefficient: ± 50 ppm/ $^{\circ}\text{C}$

Tolerance: 5%

Ydeevne: 2 W

Dækning: IP40

Antal pins: 3-pin

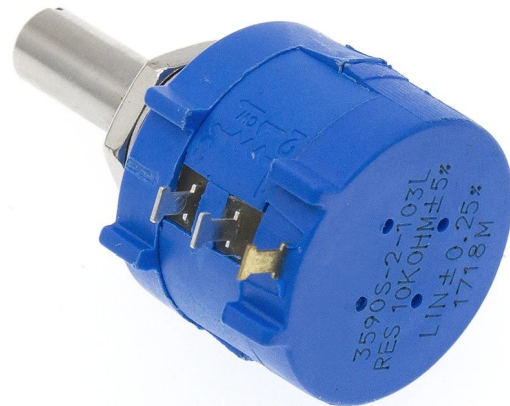

Produktvarianter:

Modstand: 101, 100 Ohm, 100R, 201, 200 Ohm, 200R, 501, 500 Ohm, 500R, 102, 1 kOhm, 1K, 202, 2 kOhm, 2K, 502, 5 kOhm, 5K, 103, 10 kOhm, 10K, 203, 20 kOhm, 20K, 503, 50 kOhm, 50K, 104, 100 kOhm, 100K

Produktbeskrivelse:

Lineært potentiometer, multi-turn med $\pm 5\%$ tolerance.

Pd - Effekttab: 2 W

Antal omdrejninger: 10 (3600 $^{\circ}$)

Potentiometertype: aksial

Type spor: tråd

Potentiometereregenskaber: præcision

Linearitetstolerance: $\pm 0,25$ %

Min. isolationsmodstand: 1000mOhm

Dimensioner: 39,3 x 18,6 mm

Skaftlængde: 12,6 mm, skaftdiameter: 6,35 mm

Monteringshulsdiameter: 9,5 mm (fastgørelse af møtrik)

Typebetegnelse:

3590S-2-101L (100 Ohm)

3590S-2-201L (200 Ohm)

3590S-2-501L (500 Ohm)

3590S-2-102L (1 kOhm)

3590S-2-202L (2 kOhm)

3590S-2-502L (5 kOhm)

3590S-2-103L (10 kOhm)

3590S-2-203L (20 kOhm)

3590S-2-503L (50 kOhm)

3590S-2-104L (100 kOhm)

Galleri:

