

Resistor 1W, 1%, wired

Reference: AM2305

EAN13: -

HS code: 85332900



Product attributes:

Resistance: 0.1 Ohm, R10, 0.33 Ohm, R33, 0.5 Ohm, R50, 1 Ohm, 1R0, 1.5 Ohm, 1R5, 2 Ohm, 2R0, 2.2 Ohm, 2R2, 2.7 Ohm, 2R7, 3.3 Ohm, 3R3, 3.9 Ohm, 3R9, 4.7 Ohm, 4R7, 5.1 Ohm, 5R1, 5.6 Ohm, 5R6, 6.2 Ohm, 6R2, 6.8 Ohm, 6R8, 7.5 Ohm, 7R5, 8.2 Ohm, 8R2, 10 Ohm, 10R, 12 Ohm, 12R, 15 Ohm, 15R, 18 Ohm, 18R, 20 Ohm, 20R, 22 Ohm, 22R, 27 Ohm, 27R, 30 Ohm, 30R, 33 Ohm, 33R, 36 Ohm, 36R, 39 Ohm, 39R, 43 Ohm, 43R, 47 Ohm, 47R, 51 Ohm, 51R, 56 Ohm, 56R, 62 Ohm, 62R, 68 Ohm, 68R, 75 Ohm, 75R, 82 Ohm, 82R, 91 Ohm, 91R, 100 Ohm, 100R, 120 Ohm, 120R, 150 Ohm, 150R, 180 Ohm, 180R, 200 Ohm, 200R, 220 Ohm, 220R, 240 Ohm, 240R, 270 Ohm, 270R, 300 Ohm, 300R, 330 Ohm, 330R, 360 Ohm, 360R, 390 Ohm, 390R, 430 Ohm, 430R, 470 Ohm, 470R, 510 Ohm, 510R, 560 Ohm, 560R, 620 Ohm, 620R, 680 Ohm, 680R, 750 Ohm, 750R, 820 Ohm, 820R, 910 Ohm, 910R, 1 kOhm, 1K0, 1.2 kOhm, 1K2, 1.5 kOhm, 1K5, 1.8 kOhm, 1K8, 2 kOhm, 2K0, 2.2 kOhm, 2K2, 2.4 kOhm, 2K4, 2.7 kOhm, 2K7, 3 kOhm, 3K0, 3.3 kOhm, 3K3, 3.6 kOhm, 3K6, 3.9 kOhm, 3K9, 4.3 kOhm, 4K3, 4.7 kOhm, 4K7, 5.1 kOhm, 5K1, 5.6 kOhm, 5K6, 6.2 kOhm, 6K2, 6.8 kOhm, 6K8, 7.5 kOhm, 7K5, 8.2 kOhm, 8K2, 9.1 kOhm, 9K1, 10 kOhm, 10K, 12 kOhm, 12K, 15 kOhm, 15K, 18 kOhm, 18K, 20 kOhm, 20K, 22 kOhm, 22K, 24 kOhm, 24K, 27 kOhm, 27K, 30 kOhm, 30K, 33 kOhm, 33K, 36 kOhm, 36K, 39 kOhm, 39K, 43 kOhm, 43K, 47 kOhm, 47K, 51 kOhm, 51K, 56 kOhm, 56K, 62 kOhm, 62K, 68 kOhm, 68K, 75 kOhm, 75K, 82 kOhm, 82K, 91 kOhm, 91K, 100 kOhm, 100K, 120 kOhm, 120K, 150 kOhm, 150K, 180 kOhm, 180K, 200 kOhm, 200K, 220 kOhm, 220K, 240 kOhm, 240K, 270 kOhm, 270K, 300 kOhm, 300K, 330 kOhm, 330K, 360 kOhm, 360K, 390 kOhm, 390K, 430 kOhm, 430K, 470 kOhm, 470K, 510 kOhm, 510K, 560 kOhm, 560K, 620 kOhm, 620K, 680 kOhm, 680K, 820 kOhm, 820K, 910 kOhm, 910K, 1 mOhm, 1M0, 2.2 mOhm, 2M2

Product features:

Power P: 1 W


Temperature coefficient: ± 50 ppm/ $^{\circ}$ C

Tolerance: 1%

Execution: Axial

Product description:

Metallized resistor, parameters can be found in the product specification.

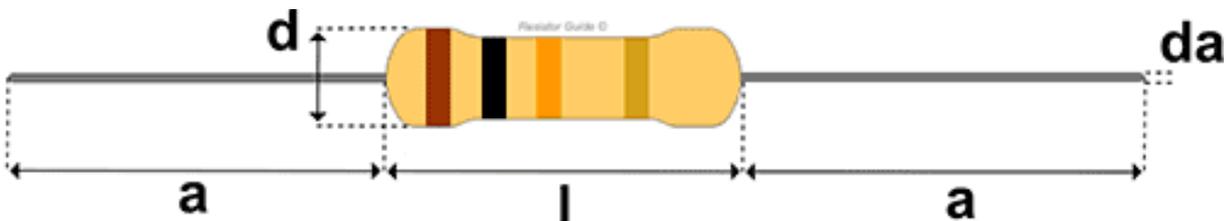

	l (± 1 mm)	d (± 0.5 mm)	and (± 3 mm)	yes (± 0.05 mm)	max. voltage
1W	11 mm	5 mm	28 mm	0.8mm	250V

