


Connection clamp WAGO PUSH WIRE 2273-208

Product codes:

Reference: AM8226

EAN13: 4050821027850

UPC: 85044090

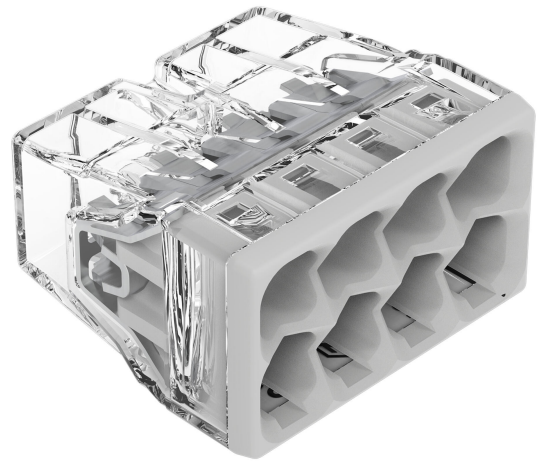

Product features:

Current: 24 A

Rated voltage: 450 V

Number of pins: 8-pin

Product attributes:

Product description:

The WAGO 2273-208 installation connection terminal is used for quick connection of wires in electrical installations using the push-in method. It is intended for solid wires and is used in distribution and installation boxes where a compact solution with multiple connection points is required.

Technical specifications

- Model: WAGO 2273-208
 - Series: 2273
 - Type: PUSH WIRE installation connection terminal
 - Number of connection points: 8
 - Connection technology: push-in
 - Designed for solid conductors
 - Nominal conductor cross-section: up to 2.5 mm²
 - Range of connectable wires: 0.5 to 2.5 mm²
 - Stripping length: 11 mm
 - Rated voltage: 450 V
 - Rated current: 24 A
 - Case color: transparent
 - Housing color: light gray
 - Insulation material: polycarbonate
-

- Contact material: electrolytic copper
- Contact surface: tin
- Clamping spring material: chrome-nickel spring steel
- Flammability class according to UL94: V2
- Dimensions: 18 x 10.4 x 16.7 mm
- Weight: 2.2g
- Maximum ambient temperature: 60 °C
- Temperature designation according to EN 60998: T60

Functions and features

- The compact transparent body allows visual inspection of the wire insertion.
- The push-in design allows direct insertion of a solid conductor without a control lever.
- Eight separate inputs are designed for connecting wires at one potential.
- The contact surfaces are surface-treated with tin.
- The terminal is intended for use in fixed electrical installations.

Ideal for

- Connecting fixed wires in domestic and industrial electrical installations.
- Installation in installation and distribution boxes.
- Branching of one potential into multiple conductors.
- Lighting, sockets and other fixed wiring in buildings.

Package contents

- 1x WAGO 2273-208 installation connection terminal

Why choose this product?

- A clearly defined number of eight connection points for connecting multiple wires in one node.
- The compact design makes it easy to install in limited space.
- The transparent housing allows you to check the correct insertion of the wire.
- Technical parameters and model designations are publicly available in WAGO product documentation.

Installation and operating instructions

- Use only with conductors within the specified cross-section range and of the appropriate type.
 - Maintain a stripping length of 11 mm.
 - Before inserting, the wire must be straight, undamaged and free of
-

dirt.

- The terminal is intended for fixed installation in a suitable electrical space, for example in an installation box.
- Installation and connection must be carried out with the power disconnected.

Safety notice

- The product is intended for electrical installations; incorrect wiring may lead to short circuits, overheating or electric shock.
- Work on electrical equipment may only be carried out by a person with appropriate professional qualifications.
- Do not exceed electrical ratings and use only compatible wires.
- Do not use after mechanical damage to the terminal or if the conductor is damaged.
- After installation, check the correct insertion of the wires and the strength of the connection.

Product gallery:

