

Fusible térmico de soldadura RY Tf 250V 15A

Kód produktu: AM6313

EAN13: -

HS kód: 85361000

Variantes de productos:

Temperatura de acción: 73 °C, 75 °C, 80 °C, 95 °C, 100 °C, 105 °C, 113 °C, 110 °C, 115 °C, 120 °C, 121 °C, 125 °C, 130 °C, 133 °C, 135 °C, 140 °C, 142 °C, 145 °C, 150 °C, 152 °C, 155 °C, 157 °C, 165 °C, 167 °C, 172 °C, 175 °C, 185 °C, 192 °C, 195 °C, 200 °C, 205 °C, 210 °C, 216 °C, 240 °C, 250 °C, 255 °C, 280 °C

Parámetros del producto:

Actual: 15 A

Tensión: 250 V AC

Tipo de fusible: Rápido

Material de la carcasa: Aluminio

Versión: Axial


Descripción del producto:

Soldadura de fusibles térmicos

Tensión nominal 250V AC


Corriente máxima de pico: 15 A

Tamaño: 4,2x12mm

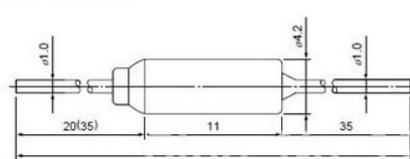


Note: The dimensions for long lead devices are in parentheses.

Before action



At normal operating temperatures, the current is routed from one end through the metal casing, the contact, to the other end of the lead (contact line), making the circuit unblocked (and vice versa).

After action



When the device is in normal working condition, the temperature sensor is melted due to the temperature rise, and the temperature sensor is melted, the spring is automatically relaxed, and the contact piece moves under the action of the straight spring, causing the contact piece and the contact line. Disconnected, the circuit is cut off.